

Drilling Angles shown are for 5" PAP – Adjust for other PAPs

Squatch Solid Drilling Chart							
	Layout	Layout Specs	Low RG	Int Diff	Total Diff	Performance Differential	RG PAP
A B C D E	Undrilled	-	2.482	0.005	0.054	0.055	
	All Purpose	Pin Over 70° x 4 1/2" x 35°		0.020	0.062	0.065	2.520
	Most Total Hook	Pin Over 70° x 3 3/4" x 20°		0.018	0.064	0.066	2.511
	Smooth Hook	Pin Under 85° x 4" x 85°		0.009	0.044	0.045	2.513
	Length with Control	Pin Under 80° x 5 1/4" x 80°		0.010	0.043	0.044	2.525
	Total Control	Pin Over 90° x 2 1/4" x 45°		0.007	0.037	0.038	2.494
F	Maximum Flare	65° x 4" x 30° with balance hole		0.035	0.081	0.088	2.527

*Layout F - Maximum Flare utilizes a balance hole and is not USBC compliant as of August 1, 2020


“Performance Differential” is a term used to accurately describe the track flare of a ball. The TRUE amount of track flare of a drilled ball is related to both the intermediate and total differential of the drilled ball. The “Performance Differential” of the drilled ball measures the relationship between the intermediate and total differential to give an accurate measure of the amount of track flare in the drilled ball.

RADICALBOWLING.COM

Suggested Layouts for Symmetric Cores


A – All Purpose

Pin Over
70° x 4 ½" x 35°

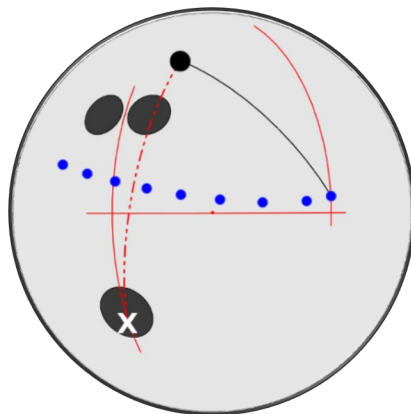


B – Maximum Hook

Pin Over
70° x 3 ¾" x 20°

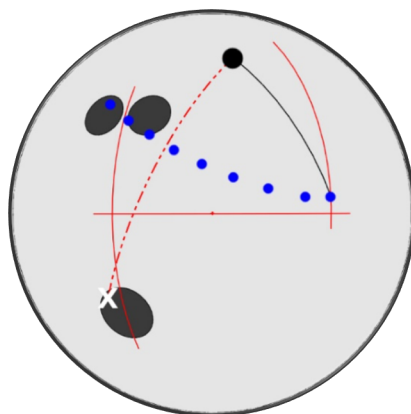


C – Smooth Hook

Pin Below
85° x 4" x 85°

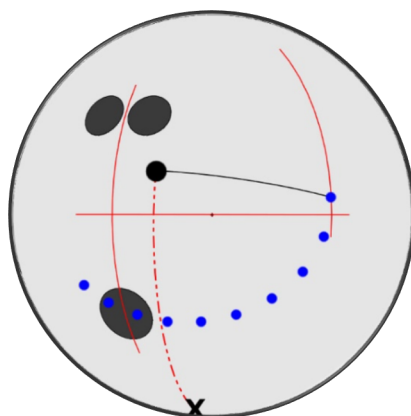


D – Length with Control

Pin Under
80° x 5 ¼" x 80°

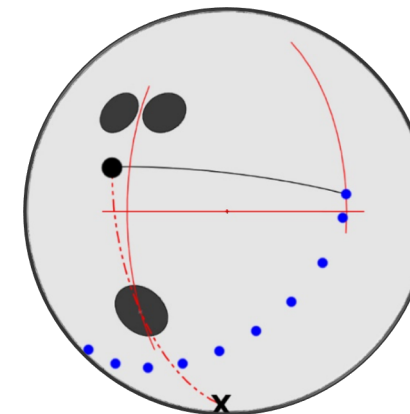

E – Total Control

Pin Beside
90° x 2 ¼" x 45°

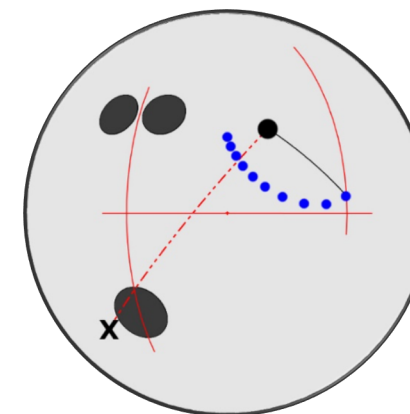

F – Maximum Flare

65° x 4" x 30°
with balance hole

**Not USBC Compliant
as of August 1, 2020*

